



Isocrete K-Screed



Bonded Screed with DPM

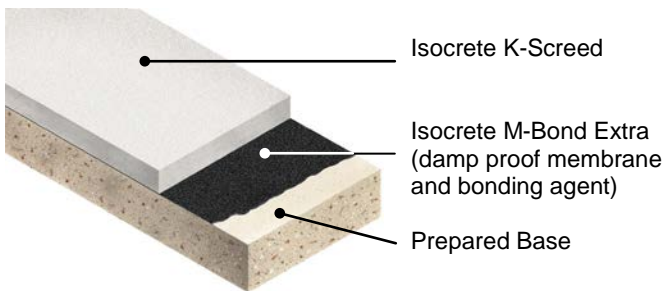

Bonded Screed

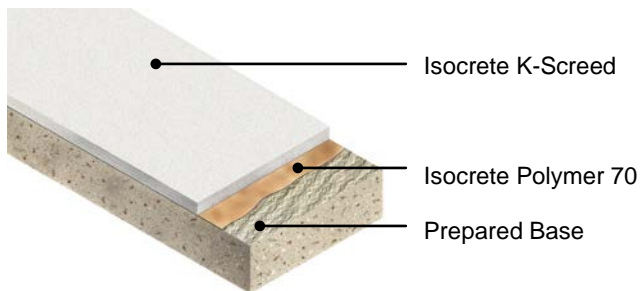

Description

Isocrete K-Screed is a semi-dry cementitious screed incorporating proprietary additives to produce an early drying, high strength screed. Standard Isocrete K-Screed and Heavy Duty Isocrete K-Screed may be laid bonded, un-bonded or floating (for weight saving and thermal or sound insulation) and may be used with proprietary underfloor heating systems.

Isocrete Composite K-Screed is a topping of Standard Isocrete K-Screed laid over a base of lightweight aggregate used for weight saving (e.g. on roofs).

Additional data sheets are available for Isocrete K-Screed for weight saving, for impact sound insulation, for thermal insulation and for underfloor heating.

Uses

High traffic areas such as airports, shopping centres and hospitals where a high strength (Category A) screed is required, especially where thin finishes such as carpet, vinyl, wood or resin are to be used.

Fast track construction and refurbishment projects where the screed needs to be trafficked or overlaid quickly. A final floor finish is required (e.g. vinyl, carpet, wood, tiles or epoxy resins).

Benefits

- Early installation of moisture sensitive finishes
- Excellent workability properties, good compaction
- High strength and resistance to construction traffic
- Can be used with underfloor heating systems
- Guaranteed to meet Category A or B BRE screed test requirements as per BS8204 –1
- Laid only by Approved Licensees
- Approved by the British Board of Agrément, certificate No. 91/2678

Project References

Heathrow, Gatwick, Chek Lap Kok, Kuala Lumpur, Dubai and Bangkok International Airports, Imperial Heights (India) , Delhi International Airport Limited(T3), Over 800 hospital projects worldwide over the past 30 years; BBC Television Headquarters; Tate Gallery; Royal Exchange; British Library; Marks and Spencer; John Lewis; Littlewoods; Debenhams. Godfrey Philips(India), Godrej Properties(India), RNA Developers(India)

Model Specification

Product: Isocrete K-Screed (Standard/Heavy Duty)
Manufacturer: Flowcrete India Pvt Ltd
Telephone: Customer Service - +91 44 4202 9831
Preparatory work and application in accordance with manufacturer's instructions.

Bonded

_____ mm Standard (or Heavy Duty) Isocrete K-Screed to be supplied and laid on an uncontaminated, shotblasted or scabbled and vacuum cleaned in situ concrete base, bonded with Isocrete Polymer 70 primer and grout (or bonded with Isocrete M-Bond epoxy bonding agent or bonded with Isocrete M-Bond Extra combined dpm and bonding agent).

Unbonded

_____ mm Standard (or Heavy Duty) Isocrete K-Screed reinforced throughout with steel fabric to BS4483 ref. D49 (or reinforced throughout with Isocrete PP Fibres with a strip of steel fabric to BS4483 ref. D49 across day joints) to be supplied and laid on a sound and clean bituminous damp proof membrane.

Floating

_____ mm Standard (or Heavy Duty) Isocrete K-Screed reinforced throughout with steel fabric to BS4483 ref. D49 (or reinforced throughout with Isocrete PP Fibres with a strip of steel fabric to BS4483 ref. D49 across day joints) laid on and including _____ mm _____ insulation board. Model specifications are also available for various other screed configurations. Please consult Flowcrete Technical Advisors.

Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at www.flowcrete.in.

Bonded

Primer:	Polymer 70 primer @ 0.05 kg/m ²	M-Bond (M-Bond Extra) @ 0.5 kg/m ²
	Polymer 70 grout @ 0.05 kg/m ²	(0.9 kg/m ²)
Minimum Screed Thickness:	Standard: 20 mm	Standard: 15 mm
Curing:	Heavy Duty: 40mm	Heavy Duty: 30mm
	Polythene sheet	Polythene sheet

Unbonded

DPM:	Proprietary bituminous membrane
Reinforcement:	Isocrete PP Fibres or D49 steel fabric
Minimum Screed Thickness:	Standard: 40mm
Curing:	Heavy Duty: 60 mm
	Polythene sheet

Floating

Insulation board / extruded polyethylene:	Proprietary materials
Reinforcement:	Isocrete PP Fibres or D49 steel fabric
Minimum Screed Thickness:	Generally 75mm (65mm domestic) but can be less on thin insulation. See separate data sheet or consult Isocrete Technical Advisors
Curing:	Polythene sheet

Standard/Heavy Duty Isocrete K-Screed used @ 135 kg/m² for 75mm thickness.

Detailed application instructions are available upon request.

Flowcrete India Private Limited (Chennai)
Ganesh Towers, Door No. B-1
1st Floor, 1st Avenue, Ashok Nagar
Chennai 600083, Tamilnadu, India
Tel: +91- 44 4202 9831 | +91 44 4017 6600
Fax: +91 44 4202 9832
Website: www.flowcrete.in
Flowcrete India is an RPM Company

Flowcrete India Pvt Ltd (Mumbai)
Unit No. F-4 First Floor
Haware's Fantasia Business Park Plot No.47
Sector 30A Opp. Vashi Railway Station
Vashi Navi Mumbai- 400703
Tel: +91 22 2781 6042
Website: www.flowcrete.in
Flowcrete India is an RPM Company

Smoothing Compounds

Isocrete K-Screeds are generally finished suitably to receive floor finishes direct. Damage to the surface of unprotected screeds may mean that a smoothing compound is necessary. However, it should be noted that the applicators of modern thin flooring will often recommend a smoothing compound on even well finished semi-dry screeds.

If smoothing compound required:

Primer: Isocrete Primer @ 0.05 kg/m²
Smoothing compound: Isocrete Self-Level Plus (3 mm) @ 5.1 kg/m².

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Density (approx.)	1,800 - 2,000 kg/m³
BRE Test Category	Category A
BS8204-1	
Compressive Strength (28 days) BS EN 196-1	Standard K-Screed : >25 N/mm² Heavy Duty K-Screed : >30 N/mm²

Speed of Cure

	10 °C	20 °C
Working time	2 - 3 hrs	2 hrs
Light foot traffic	48 hrs	24 hrs
Full traffic	7 days	7 days
Curing under polythene	7 days	7 days

Drying time to receive finishes (BS8203) 1 week per 25mm in good drying conditions (20 °C, 50% RH, good ventilation) from removal of the curing polythene sheet.

Residual Moisture content

Before floor finishes are laid, the moisture content of the screed should be checked by the main contractor. BS8203 recommends a maximum of 75% prior to the installation of sensitive finishes. Moisture in the base will impede the drying of the screed. For unbonded and floating screeds, a dpm may be specified between the base slab and the screed. For bonded screeds, Isocrete M-Bond Extra epoxy resin combined dpm and bonding agent may be used.

Standard and Heavy Duty Isocrete K-Screed

Standard Isocrete K-Screed is suitable for most commercial applications. Heavy Duty Isocrete K-Screed is recommended in areas requiring Category A soundness (heavy trafficking, e.g. airport terminals, hospital streets, operating theatres and X-ray suites, stock rooms, lift lobbies, plant rooms, etc.) and areas in commercial buildings that will receive resin floor finishes. (For industrial screeds, consult Isocrete for appropriate screed specifications).

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Further Information

To ensure you are specifying a fit for purpose flooring system for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.