

Flowseal WB



Description

Flowseal WB is a two component, aliphatic, UV stable, pigmented, water-based polyurethane floor sealer.

Uses

Typically used as a UV stable, clear or pigmented seal coat applied to concrete, screeds or epoxy resin systems.

Benefits


- UV resistant – non yellowing
- Good abrasion resistance
- Hard wearing
- Low VOC
- Low odour
- Easy to apply
- Easy to clean and maintain

Standard Colour Chart



The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

System Design

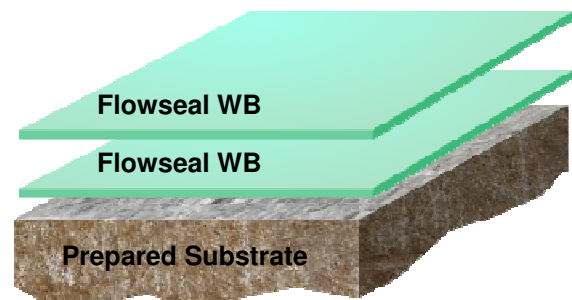

Model Specification

Product: Flowseal WB
Finish: Gloss
Thickness: 0.20 mm Dry Film Thickness (2 coats)
Colour: _____
Manufacturer: Flowcrete India Pvt Ltd
Telephone: Customer Service - +91 44 4202 9831
Preparatory work and application in accordance with manufacturer's instructions.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/ mm², free from laitance, dust and other contamination. The substrate should be surface dry to 95% RH as per BS8204 and free from rising damp and ground water pressure.

Products Included in this System

Flowseal WB

For actual coverage rates, refer to the appropriate project specification.

Detailed application instructions are available upon request.

Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at www.flowcrete.in.

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Focus on the Floorzone

Flowcrete India Pvt Ltd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance	BS476-7:1987 Class 1 Surface spread of flame
Slip Resistance	TRRL Pendulum Slip Test Dry >40 Wet depends on specification
Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.	
Temperature Resistance	Tolerant up to 65 °C
Vapour Permeability	ASTM:E96:90 20g/m²/mm/24hr
Surface Hardness	182secs. Koenig Hardness Test
Chemical Resistance	Contact Technical Department
UV Light Resistance	Excellent
Abrasion Resistant	Taber Abrader: 0.1g loss per 1000 cycles (1 kg load using CS17 wheels)
Bond Strength	Greater than cohesive strength of 25 N/mm ² concrete. >1.5 MPa.

Speed of Cure

	10 °C	20 °C	30 °C
Light traffic	24 hrs	16 hrs	12 hrs
Full traffic	36 hrs	24 hrs	16 hrs
Full chemical cure	14 days	7 days	6 days

Low relative humidity and good ventilation are pre-requisites to achieving the above drying times.

Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.