

Flowseal ESD Dissipative



Standard Colour Chart



The applied colours are slightly darker than the examples shown above due to the inclusion of antistatic additives.
Contact our customer services for a true colour sample a special colour match.

Description

Flowseal ESD Dissipative is a conductive, hygienic, water-based epoxy floor coating in coloured satin finish. Complies with ANSI/ESD S7.1 and ASTM F150 Dissipative requirements.


Uses

Flowseal ESD Dissipative is suitable for use in laboratories, cleanrooms, equipment testing areas, warehouses, electronic, aerospace, automotive printing and pharmaceutical plants subject to pedestrian and light traffic.

Benefits

- Meets ANSI/ESD S7.1 and ASTM F150 Dissipative Requirements.
- Hygienic
- Enhances appearance of working environment
- Solvent free
- Low odour
- Easy to clean and maintain

System Design

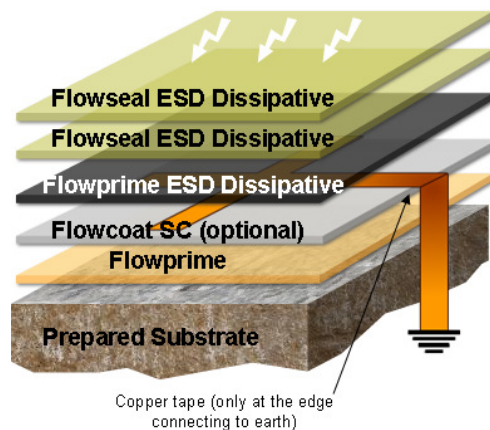

Model Specification

Product: Flowseal ESD Dissipative
Conductive Finish: Satin
Thickness: Dependant on specification
Colour: _____
Manufacturer: Flowcrete India Pvt Ltd
Telephone: Customer Service - +91 44 4202 9831
Preparatory work and application in accordance with manufacturer's instructions.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm², free from laitance, dust and other contamination. The substrate should be dry upto 75% RH as per BS8204 and free from rising damp and ground water pressure. Application of a 1mm self-smoothing product also requires a smooth substrate.

Products Included in this System

Flowprime
Flowcoat SC (Optional)
Flowprime ESD Dissipative
Flowseal ESD Dissipative

For actual coverage rates, refer to the appropriate project specification.

Detailed application instructions are available upon request.

Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at www.flowcrete.in.

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Focus on the Floorzone

Flowcrete India Pvt Ltd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance BS476:Part 7:1987
Class 1 Surface spread of flame.

Slip Resistance TRRL Pendulum Slip Test
Dry >40, Wet depends on specification

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Temperature Resistance **Tolerant up to 60 °C**

Chemical Resistance Contact Technical Department

Abrasion Resistance Taber Abrader:
0.15g loss per 1000 cycles
(1kg load using CS10 wheels)

Electrical Resistance **1.0x10⁶ to 1x10⁹ Ohms**

Bond Strength Greater than cohesive strength of 25N/mm² concrete. **>1.5 MPa.**

Speed of Cure

| | 10 °C | 20 °C | 30°C |
|--------------------|---------|--------|--------|
| Light traffic | 24 hrs | 15 hrs | 10 hrs |
| Full traffic | 36 hrs | 24 hrs | 18 hrs |
| Full chemical cure | 14 days | 7days | 6days |

Low relative humidity and good ventilation are pre-requisites to achieving the above drying times.

Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.