

Flowcoat HS



Standard Colour Chart



The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

Description

Flowcoat HS is a solvent free, durable, high performance epoxy resin coating system.

Typical Uses

Flowcoat HS may be used as a hard wearing coloured floor coating in areas such as factories, warehouses, plants and storerooms.


Benefits

- Good chemical resistant
- Hard wearing
- Abrasion resistant
- Solvent free, low odour
- Aesthetically attractive - brightens up dull factories and warehouses
- Seamless and hygienic finish
- Low maintenance

Project References

HK Trade Development Council, KLIA, Snow Jelly Factory, New StraitTimes Newspaper Factory, Ericsson Mobile Communications, Glaxo Pharmaceutical China.

System Design

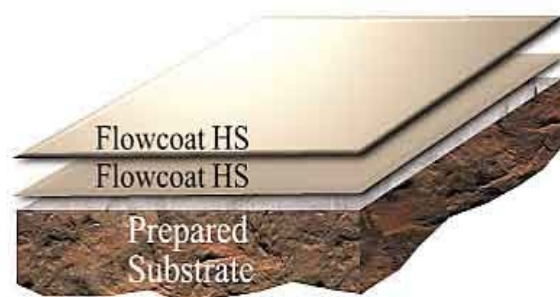

Model Specification

Product: Flowcoat HS
Finish: Gloss
Thickness: Dependant on specification
Manufacturer: Flowcrete India Pvt Ltd
Telephone: Customer Service - +91 44 4202 9831
Preparatory work and application in accordance with manufacturer's instructions.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/ mm², free from laitance, dust and other contamination. The substrate should be dry upto 75% RH as per BS8204 and free from rising damp and ground water pressure.

Products Included in this System

Flowcoat HS

For actual coverage rates, refer to the appropriate project specification.

Detailed application instructions are available upon request.

Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at www.flowcrete.in.

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Focus on the Floorzone

Flowcrete India Pvt Ltd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance BS476-7:
Surface spread of flame: **Class1**

Slip Resistance TRRL Pendulum Slip Test
Dry >40, Wet depends on specification

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Thermal Resistance **Tolerant up to 60 °C**

Water Permeability Nil – Karsten test (**impermeable**)

Surface Hardness **180secs.** Koenig Hardness Test

Chemical Resistance Contact Technical Department

Abrasion Resistance Taber Abrader:
80 mg loss per 1000 cycles
(1 kg load using CS10 wheels)

Compressive Strength **60 N/mm²** (BS6319)

Flexural Strength **60 N/mm²** (BS6319)

Tensile Strength **15 N/mm²** (BS6319)

Bond Strength Greater than cohesive strength of 25 N/mm² concrete. **>1.5 MPa.**

Speed of Cure

	10°C	20°C	30°C
Light traffic	48 hrs	16 hrs	12 hrs
Full traffic	72 hrs	48 hrs	40 hrs
Full chemical cure	12 days	7days	6days

Aftercare - Cleaning and Maintenance

Clean floors regularly using a rotary scrubber in conjunction with a mildly alkaline detergent (without solvent).

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Further Information

To ensure you are specifying a fit for purpose flooring system for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.