

## Flowshield SK 1000 (1 mm)



### Standard Colour Chart



The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

### Description

Flowshield SK 1000 is a solvent free, epoxy self-smoothing flooring system applied at 1 mm thickness with excellent resistance to Skydrol® and hydraulic fluids.

### Uses

Typical uses are aircraft hangars, aircraft parking areas and workshops.


### Benefits

- Resistant to contaminants in hangars such as Skydrol®, jet fuel & engine oil
- Excellent chemical resistance
- Seamless finish
- Hygienic and easy to clean
- Attractive; high gloss finish
- High abrasion resistance
- Solvent free; low odour

### Project References

British Aerospace; Airbus; MyTravel; Manchester Airport; Glasgow Airport.

### System Design

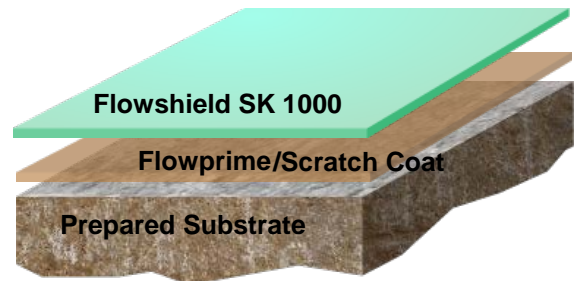

### Model Specification

Product: Flowshield SK1000  
Finish: Gloss  
Thickness: 1 mm  
Colour: \_\_\_\_\_  
Manufacturer: Flowcrete India Pvt Ltd  
Telephone: Customer Service - +91 44 4202 9831  
Preparatory work and application in accordance with manufacturer's instructions.

### Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/ mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry upto 75% RH as per BS8204 and free from rising damp and ground water pressure.

### Products Included in this System

Flowprime /Scratch Coat  
Flowshield SK 1000

Detailed application instructions are available upon request.

### Installation Service

The installation should be carried out by a Flowcrete approved applicator with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site at [www.flowcrete.in](http://www.flowcrete.in).

### Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during the manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

### Focus on the Floorzone

Flowcrete India Pvt Ltd is a division of the Flowcrete Group, world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing and corrosion protection systems... to name just a few. Our corporate objective is to satisfy your flooring needs.

### Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Fire Resistance	BS476: Part 7 Surface spread of flame: <b>Class 2 (indicative)</b>
Slip Resistance Value	TRRL Pendulum Test <b>Dry 67</b>
Temperature Resistance	<b>Tolerant up to 60 °C</b>
Water Permeability	Nil-Karsten test ( <b>impermeable</b> )
Vapour Permeability	<b>4 gms / m<sup>2</sup> / mm / 24 hours</b>
Surface Hardness	<b>180 secs.</b> Koenig Hardness Test
Chemical Resistance	Contact Technical Department
Abrasion Resistance	Taber Abrader: <b>90mg loss per 1000 cycles</b> (1kg Load using CS17 wheels)
Compressive Strength	<b>&gt;60 N/mm<sup>2</sup></b> (BS6319)
Flexural Strength	<b>&gt;40 N/mm<sup>2</sup></b> (BS6319)
Tensile Strength	<b>&gt;25 N/mm<sup>2</sup></b> (BS6319)
Bond Strength	Greater than cohesive strength of 25N/mm <sup>2</sup> concrete. <b>&gt;1.5 MPa.</b>
Toxicity	<b>Taint free to sensitive foodstuffs.</b>

### Speed of Cure

	10 °C	20 °C	30 °C
Light traffic	48 hrs	24 hrs	16 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	12 days	7 days	6 days

### Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

### Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

### Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.